



POWER BELLOWS COUPLINGS

When ordering a certain type of bellows coupling, please use the following signification:

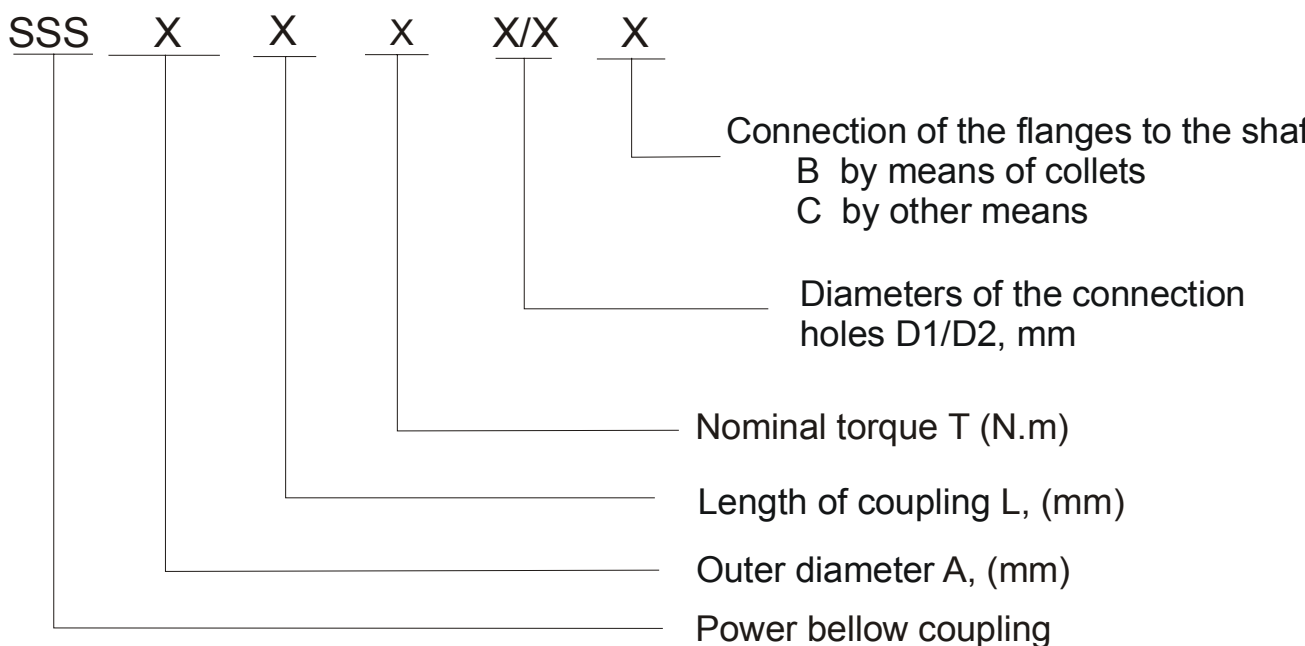

SSS 38 X.X X/X B

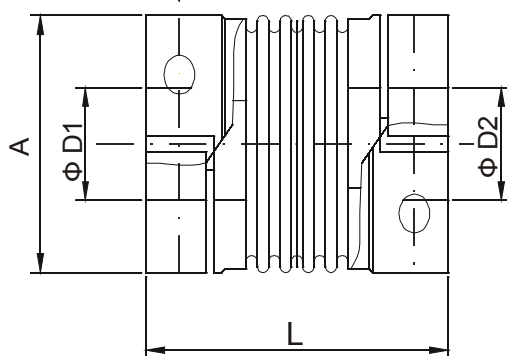

SELECTION TABLE

Type	SSS 38	SSS 48	SSS 73	SSS 75	SSS 92	SSS 105	SSS 125
T Nominal torque (Nm)	10	18	100	80	200	300	500
A (mm)	38	48	73	75	92	105	125
L (mm)	92*	102*	140*	150*	135*	180*	205*
D₁/D₂ min-max (mm)	6 - 22	8 - 27	12 - 37	14 - 42	22 - 42	30 - 60	35 - 60
Rotational speed, max (min⁻¹)	12 000	10 000	6800	6600	6200	580	4800
Axial displacement (mm)	1	1	1	2	2	2,5	2,5
Radial displacement (mm)	0,15	0,15	0,1	0,2	0,25	0,25	0,3
Angular displacement (grad)	1,5	1,5	1	1,5	1,5	1,5	1,5

* Size "L" be able specify on depends of construction decision of flanges.